

RG-EW3000GX PRO 3000M Wi-Fi 6 Dual-Band Gigabit Mesh Router


DATASHEET



Highlights

- Next-generation gigabit Wi-Fi 6 standard
- WAN aggregation
- Gaming engine providing unrivalled gaming experience
- Strong signals received
- Exclusive Reyee mesh providing whole-home Wi-Fi coverage
- Control of your home network at your fingertips



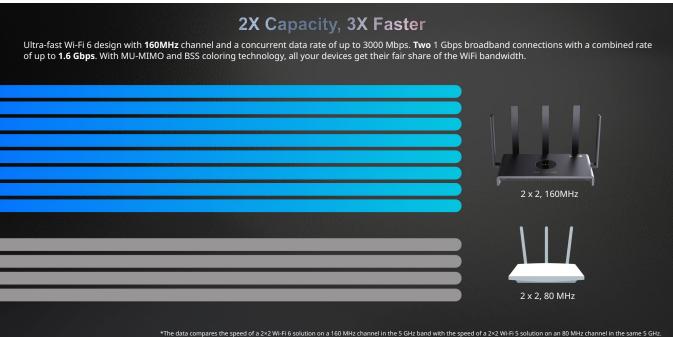















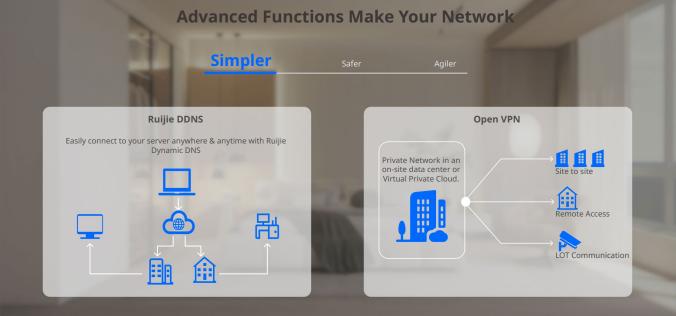

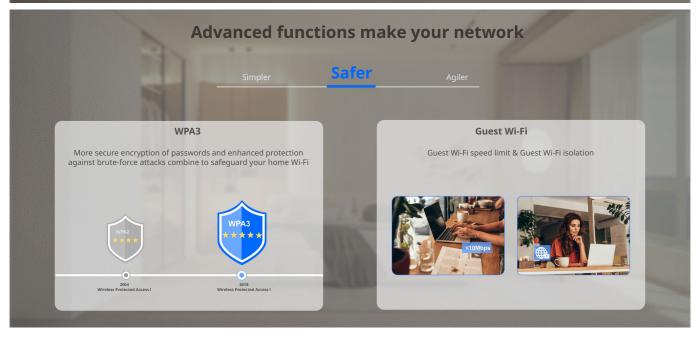

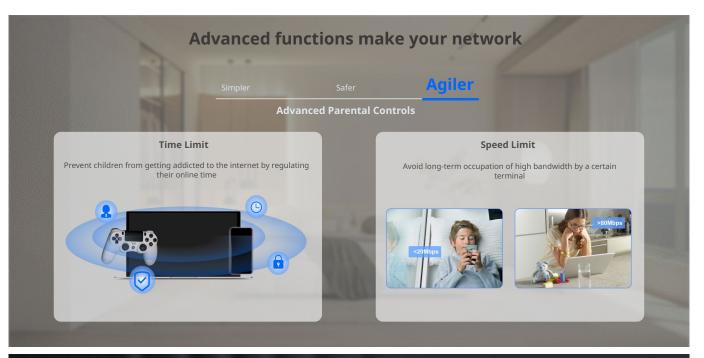

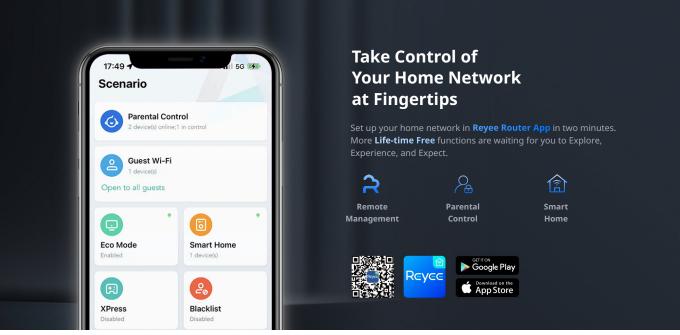

.

.

Specifications

	Basic
Dimensions (W×D×H)	260 mm × 140 mm × 30 mm (10.24 in. × 5.51 in. × 1.18 in. antennas not included)
Weight	0.48 kg (packages not included)
Wi-Fi Standards	Wi-Fi 6 (802.11ax)
MIMO	2.4 GHz, 2×2, MU-MIMO 5 GHz, 2×2, MU-MIMO
Max. Wi-Fi Speed	2.4 GHz: 574 Mbps 5 GHz: 2402 Mbps
Channel Width	2.4 GHz: Auto/20/40 MHz 5 GHz: Auto/20/40/80/160/MHz
Antennas	5
Antennas Type	External Omnidirectional
Antenna Gain	2.4 GHz: 5 dBi 5 GHz: 5 dBi
WAN Port	1×10/100/1000 Base-T
LAN Ports	3×10/100/1000 Base-T
Recommended Users	60
Max. Users	192
Power Supply	DC 12V/1.5A
Power Consumption	< 18 W
Operation Frequency Bands	802.11b/g/n/ax: 2.400 GHz to 2.483 GHz 802.11a/n/ac/ax: 5.150 GHz to 5.350 GHz 802.11a/n/ac/ax: 5.470 GHz to 5.725 GHz , 5.725 GHz to 5.850 GHz country-specific restrictions apply
DFS	✓
Transmit Power	General: CE EIRP: ≤20dBm (2.4GHz) ≤27dBm (5GHz) ≤20dBm 2400~2483.5MHz Myanmar: 2400~2483.5MHz ≤ 20dBm(EIRP); 5150~5350MHz ≤ 23dBm(EIRP); 5470~5725MHz ≤ 30dBm(EIRP); 5725~5850MHz ≤ 30dBm(EIRP);

Specifications

	Basic	
Receive Sensitivity	2.4 GHz:20MHz 802.11b: -91 dBm(1 Mbps) 802.11g: -91 dBm(6 Mbps), -72 dBm(54 Mbps) 802.11n: -90dBm(MCS0), -70 dBm(MCS7) 5 GHz:20MHz 802.11n: -85 dBm(MCS0), -67 dBm(MCS7) 802.11a: -89 dBm(6 Mbps), -72 dBm(54 Mbps) 802.11ac: -90dBm(MCS0), -63dBm(MCS8) 802.11ax: -88dBm(MCS0), -62dBm(MCS8), -58dBm(MCS11)	
Operating Temperature	-10 °C to +40 °C (14 °F to 113 °F)	
Operating Humidity	5% to 95% Noncondensing	
Wireless		
OFDMA	-	
MU-MIMO	~	
BSS Coloring	✓	
Maximum Number of SSIDs	6	
SSID Hiding	✓	
Band Steering	~	
Guest Wi-Fi	✓	
WPA/WPA2	~	
WPA3	✓	
Roaming	Layer 2 Roaming	
Blacklist	✓	
Reyee Mesh	~	
Mesh Pairing by Hardware	✓	
Mesh Pairing by Mesh Button	~	
Mesh Pairing by Eweb	✓	
Recommended Hop Count	≤5	



	Wireless
Wi-Fi Optimization	✓
QoS (WMM)	✓
WPS	-
Transmission Power Adjustment	~
	Hardware
CPU	MT7981
Flash	128 MB
RAM/SDRAM	256 MB
Color	Black
System LED Indicator	✓
Reyee Mesh LED Indicator	✓
Reyee Mesh Button	✓
Power Button	-
Reset Button	✓
DC Connector Dimensions	Outer Diameter: 5.5 mm Inner Diameter: 2.1 mm Length: 9.5 mm (Outer Diameter: 0.22 in. Inner Diameter: 0.08 in. Length: 0.37 in.)
	WAN
Static IP	✓
DHCP	✓
PPPoE	✓
Learning PPPoE Account & Password	✓
VLAN Tagging	

Specifications

	LAN	
DHCP Server	~	
Client List	✓	
Static IP Assignment	✓	
Port-Based Flow Control	~	
Features Features		
TR069	✓	
IPv6	✓	
DDNS	✓	
IPTV	✓	
Alarm	✓	
Diagnosis	✓	
UPnP	✓	
ARP Binding	✓	
Port Mapping	✓	
DMZ Host	✓	
Rate Limitation of Terminals	✓	
Hardware Acceleration	✓	
MAC Address Cloning	✓	
Cloud Management	✓	
Repeater Mode	✓	
WISP Mode	✓	
Security		
PPTP VPN Server	✓	
PPTP VPN Client	✓	



	System
L2TP VPN Client	-
Parental Control	Time Schedule
Protect TCP Flood Attacks	✓
Protect ICMP Attacks	-
Protect UDP Flood Attacks	-
	System
Default Access/Password	192.168.110.1 No Password Required by Default
URL Access	✓
Local Upgrade	✓
Online Upgrade	✓
APP Upgrade	✓
Syslog	✓
Backup	✓
Factory Reset	✓
Language	Chinese English Vietanmese Turkish Indonesian Thai traditioanl Chinese Spanish Russian Arabic Ukrainian Czech Italian



Package Information	RG-EW3000GX PRO
Wireless Router	1
Power Adapter	1
Quick Installation Guide	1
Cat5E UTP Cable	1
Warranty Card	1





Copyright ©2000-2024 Ruijie Networks Co., Ltd. All rights reserved.

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

Notice

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd.
Website: https://reyee.ruijie.com/en-global