

YHS34 Datasheet

Wideband Headset for Yealink IP Phone

YHS34: Leather ear cushions YHS34 Lite: Foamy ear cushions

Yealink YHS34/YHS34 Lite is the over-the-head style headset which is made for office worker, SOHO, or call center staff. It supports QD (Quick Disconnect) feature and it is compliant with the full range of Yealink enterprise IP phones. The Yealink YHS34/YHS34 Lite, available in monaural (YHS34/YHS34 Lite Mono) and binaural (YHS34/YHS34 Lite Dual), is a professional analog wired headset with crystal clear audio. The YHS34/YHS34 Lite offers a lightweight form factor that is comfortable to wear, even for an entire workday. It's suitable for workers who spend a lot of time wearing headsets for voice communications.



YHS34/YHS34 Lite Mono

YHS34/YHS34 Lite Dual

Key Features

Perfectly compatible with Yealink Phones

Runs right out of box, a QD to RJ9 plug-and-play setup makes the connectivity to Yealink IP phones. The phones can automatically optimizes acoustic parameters for your YHS34/YHS34 Lite. Perfect match with Yealink desk phones give you optimized audio quality.

Unparallel Audio Experience

Made for calls, YHS34/YHS34 Lite is kitted out with a high signal-to-noise ratio speaker and independent cavity design. The passive noise cancellation creates a richer and clearer conversations with reduced background noise.

Ultra-lightweight, All Day Wearing Comfort

Built for comfort with soft ear cushions and ultra-lightweight materials, the YHS34/YHS34 Lite is 10%~30%* lighter than other conference headsets in the same range. Its ergonomic design makes this headset comfortable enough for long conference calls and all day use. (* Test data provided by Yealink Lab)

Specifications




Specificatio ns	Introduction	
Main Features	 Plug-and-play RJ9 connectivity to Yealink IP phones, including T19 § E2/T21 § E2/T23P/T23G/T27G/T29G/T30/T30P/T31/T31P/T31G/T33P/T33G/T40P/T40G/T41S/ T42S/T46S/T48S/T42U/T43U/T46U/T48U/T53/T53W/T54W/T57W/T58A/VP59/T41S SFB/T42S SFB/T46S SFB/T48S SFB/T55A SFB/T56A SFB/T58ASFB/MP56 HD Voice/Wideband speaker performance Noise-canceling microphone and passive noise cancellation ActiveProtection technology safeguards users from acoustic injur y 320° bendable boom ar m for easy adjustment without breaking 	
General	 Headset cable length: 0.9m QD to RJ9 cab le length: 1.2m Color: Black Storage temperature: -30 °C to - 70 °C Operating temperature: -10 °C to - 50 °C 	
Microphone	 Microphone type: Uni-Directional ECM Microphone frequency response r ange: 100 Hz-8 kHz Microphone bandwidth: Wideband Microphone Sensitivity: -44.0 dB re . 1 V/Pa 	
Speaker	 Speaker size: 28mm Speaker sensitivity: 93 dB SPL @ 1 kHz Speaker Frequency response range: 20 Hz-20 kHz Speaker impedance: 32Ω, @ 1.0 kHz Speaker input power: max 10 mW Speaker bandwidth: Wideband 	
Package Features	 Package content: YHS34 Mono Headset or YHS34 Dual Headset or YHS34 Lite Mono Headset or YHS34 Lite Dual Headset (YHS34 with leather ear cushions/YHS34 Lite with f oamy ear cushions) QD to RJ9 cab le Quick Start Guide Qty/CTN: 20 PCS N.W/CTN: YHS34 Mono: 3.128 kg / YHS34 Dual: 3.798 kg / YHS34 Lite Mono: 3.048 kg / YHS34 Lite Dual: 3.638 kg G.W/CTN: YHS34 Mono: 3.778 kg / YHS34 Dual: 4.456 kg / YHS34 Lite Mono: 3.698 kg / YHS34 Lite Dual: 4.296 kg Giftbox size: 170 mm x 195 mm x 63 mm Carton Meas: 345 mm x 325 mm x 400 mm 	

Product Type



Product Type	SKU	Model Name
	1308022	YHS34 Mono
	1308023	YHS34 Dual
	1308028	YHS34 Lite Mono
Bundanta	1308029	YHS34 Lite Dual
Products	1308089	YHS34 Mono for 3rd Party
	1308090	YHS34 Dual for 3rd Party
	1308091	YHS34 Lite Mono for 3rd Party
	1308092	YHS34 Lite Dual for 3rd Party
	330000008028	QD to RJ9 Cord
	330000008063	QD to RJ9 Cord for 3rd Party
	1308076	YHM341
	1308077	YHD342
	1308078	YHM341 Lite
Accessories	1308079	YHD342 Lite
	330100010021	Foamy Ear Cushion for UH34/YHS34 (1 PCS)
	330100010022	Leather Ear Cushion for UH34/YHS34 (1 PCS)
	330100010023	Foamy Ear Cushion for UH34/YHS34 (12 PCS)
	330100010024	Leather Ear Cushion for UH34/YHS34 (12 PCS)

Connection

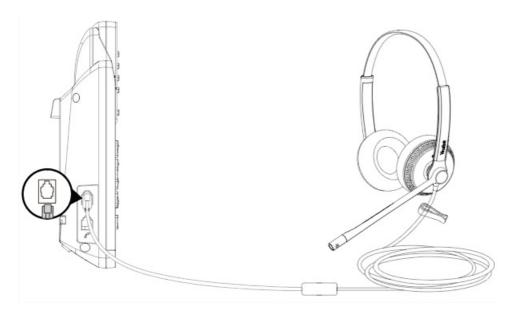

For more information, please go to the Yealink official website.