


AC1200 Wi-Fi Bluetooth PCIe Adapter

Arm Your PC with Next-Gen Wi-Fi Technology















Highlights

AC1200 Dual Band Wi-Fi

The Archer T4E receives Wi-Fi signals on two separate bands for all your online needs. Choose the 300Mbps 2.4GHz band for surfing, emailing and social media, or switch to 867Mbps 5GHz for gaming, streaming and large file downloads.

Bluetooth 5.0 Compatible

Archer T4E equips your PC with Bluetooth 5.0 technology that runs faster connection speeds and farther range compared with older versions, ensuring a strong and stable wireless connection between your PC and Bluetooth devices. ‡

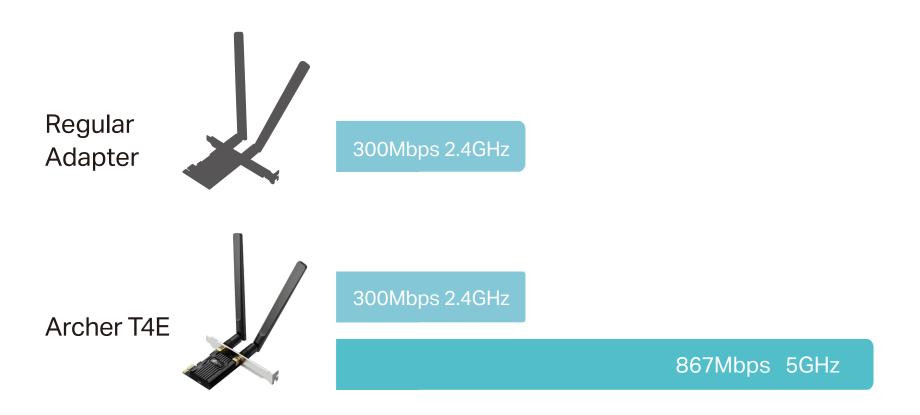



Specifications

WLAN Features

· Wireless Standards:

IEEE 802.11ac/n/a 5 GHz, IEEE 802.11n/g/b 2.4 GHz

· Signal Rate:

5 GHz

11ac: Up to 867 Mbps(dynamic)

11n: Up to 300 Mbps(dynamic)

11a: Up to 54 Mbps(dynamic)

2.4 GHz

11n: Up to 300 Mbps(dynamic)

11g: Up to 54 Mbps(dynamic)

11b: Up to 11 Mbps(dynamic)

· Reception Sensitivity:

5 GHz:

11ac HT80 MCS9 -65dBm

11ac HT80 MCSO -90dBm

11ac HT20 MCS8 -74dBm

11ac HT20 MCSO -95dBm

2.4 GHz:

11n HT40 MCS7 -72dBm

11n HT40 MCS0 -92dBm

11n HT20 MCS7 -76dBm

11n HT20 MCSO -94dBm

· Transmit Power:

5 GHz: 28dBm(FCC) / 23dBm(CE) (EIRP),

2.4 GHz: 24dBm(FCC) / 20dBm(CE) (EIRP)

- · Wireless Modes: Infrastructure mode
- · Interface: PCI Express, F_USB
- · Wireless Security: WEP, WPA/WPA2/WPA3, WPA-PSK/WPA2-PSK
- Modulation Technology: DBPSK, DQPSK, CCK, OFDM, 16-QAM, 64-QAM, 256-QAM

Specifications

Bluetooth Features

- · Standards and Protocols: Bluetooth 5.0, Bluetooth 4.2, Bluetooth 4.0
- · Interface: F_USB 2.0

Hardware

- · Antennas: 2 Detachable External Antennas
- Dimensions: 4.76 × 3.09 × 0.85 in (120.8 × 78.5 × 21.5 mm)

Others

· Package Contents

AC1200 Wi-Fi Bluetooth PCle Adapter Archer T4E

Two High Gain Dual-Band Antennas

Low-Profile Bracket

Bluetooth Header Cable

Quick Installation Guide

Resource CD

Certification

FCC, CE, RoHS

· System Requirements

Windows 10/11

· Environment

Operating Temperature: 0°C~40°C (32°F~104°F)

Operating Humidity: 10%~90% non-condensing

Storage Humidity: 5%~90% non-condensing



For more information, please visit https://www.tp-link.com/products/details/?model=Archer+T4E_V3 or scan the QR code left

©2025 TP-Link

†Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless coverage, and quantity of connected devices are not guaranteed and will vary as a result of network conditions, AP limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and AP location.

‡Several new features are introduced in the Bluetooth Core Specification 5.0 Releases, including 2× faster speed and 4× broader coverage compared with Bluetooth 4.2.